



PRO-3.2G tank

SPECIFICATION

Size: 28x28x34(cm)

11.02x11.02x13.77(inch)

Connector: 1/4"

Material: Steel, rubber, PP

Storage pressure: 5-7 psi

Water storage pressure: 40-55 psi

Maximum Working Pressure: 100 psi

Pre-charged pressure: 6 psi

28 cm



34 cm



Bottom



Top



Base




Air valve



1/4" connector

water storage space

Air storage space

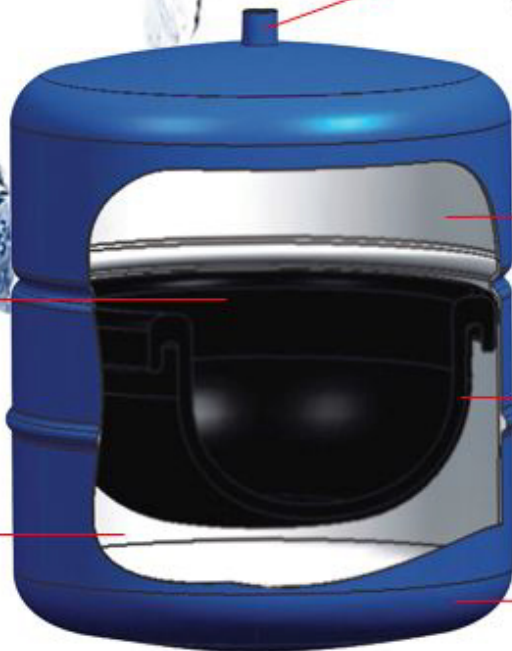

Food grade PP inner

Butyl rubber diaphragm

Stoving varnish surface

When water outside entering the tank with pressure, air inside the tank will be pressand air pressure raising, till air pressure high as flowing water pressure, water will stop entering.

When water outflow that tank, water pressure inside would be lower than air pressure inside, water will be press out the tank till water pressure and air pressure become balance, water outflow stop.



3 YEARS WARRANTY